

# » TWISTLOC


## Quick-change nozzle system



### Lechler TWISTLOC, nozzle changing in less than no time.

Save time and money with the quick-change nozzle system.

- **Quick:**  
It takes just one twist to install or remove the nozzle.
- **Easy:**  
Can be installed without tools – even in difficult-to-access locations and in bad lighting conditions.
- **Safe:**  
Installation errors are avoided, as the nozzles are always set to the correct direction.
- **Max. pressure:**  
15 bar.

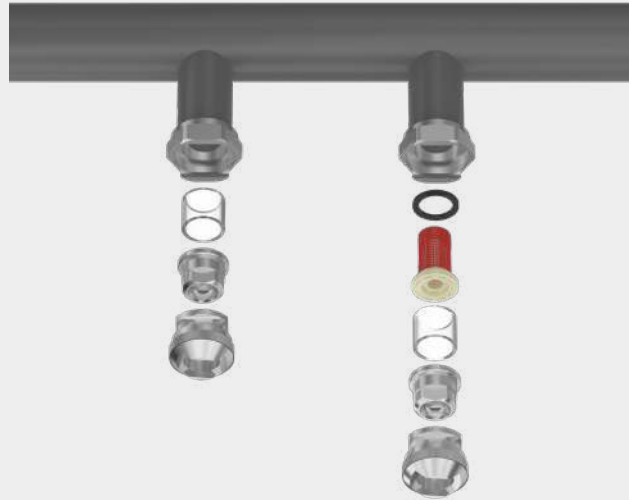

System components		Ordering no.							Inner Ø D [mm]	Weight [g]	
		Type	Mat. no.				Code				
			1C Stainless steel 304	16 Stainless steel 303	5E PVDF	7A Viton	1/4 BSPT	3/8 BSPT			Welded connec- tion
<b>Threaded nipple</b>		092.102	●				CC		8.0	25.0	
		092.102	●					CE		11.6	25.0
		092.102			●				CE		8.0
<b>Welded nipple</b>		092.104	●					00		11.6	45.0
<b>Gasket for material 304 SS and 303 SS</b>		092.113								–	1.0
<b>Gasket for material PVDF</b>		092.115								–	1.0
<b>Gasket, incl. rubber gasket ring for use with non-return valves or strainers</b>		092.116								–	2.0
<b>Gasket, incl. rubber gasket ring for use with non-return valves or strainers, for PVDF material</b>		092.114								–	2.0
<b>Quick-release system</b> For nozzle series 652/679		092.106	●	●						–	20.0 (stainless steel)
<b>Quick-release system</b> For nozzle series 226/468/684		092.108	●	●						–	20.0 (stainless steel)



**Non-return valves, strainers**  
For installation in nipples with inner Ø 11.6 mm (see Page 260/261).

Ordering Type + Material no. + Code = Ordering no.  
example: 092.102 + 16 + CC = 092.102.16.CC